

M-42(W)G2 / M-242(W)G2

4" Two way passive installation loudspeaker (sealed)

M-42(W)G2工程安装系列是专门针对中小型场所扩声设计的全频音箱，如咖啡厅，餐厅，专卖店和家庭录音等场所，亦可作为环绕箱与M-88BG2&M-88ABG2组合使用。产品设计独具魅力，箱体采用了坚固的中纤板及非常耐用的撒点漆；智能化的SMB铝支架确保了最佳的安装灵活性及角度可调性。白色款可选。

M-242(W)G2音箱，采用双4"低音单元和出色的球型Kaptom丝膜高音，有更大的应用功率更高的声压及更紧凑的结构设计，内置SMB铝支架。白色款可选。


M-42(W)G2 is ideal for use either as a full-range speaker for smaller installations, cafes, bistros, fashion shops or as a satellite in combination with M-88BG2 & M-88ABG2. The attractive design features a sturdy MDF housing with a very durable textured finish. Optimal installation is ensured by the included Smart-Mounting-Bracket. White colour is available.

The M-242(W)G2 features 2 x 4" woofers. It offers higher SPL and an attractive and compact design. Smart-Mounting-Bracket included. White colour is available.

1 应用领域 Application

- 咖啡厅 Cafes
- 小餐馆 Bistros
- 小型会议 Small-scale meeting
- 时装店 Fashion shop

2 结构图 Structural diagram

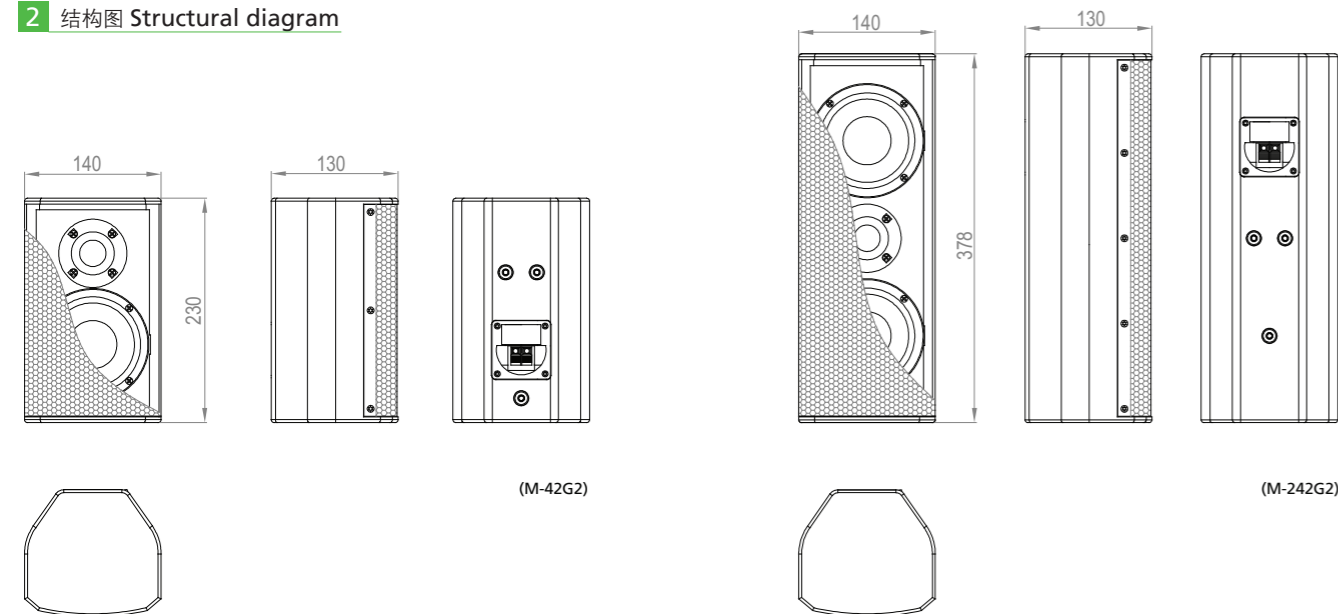

3 参数规格 Specification

型号名称: M-42 (W) G2	Model: M-42 (W) G2
类型: 4" 无源二分频音箱(密闭式)	Type: 4" two way passive loudspeaker (sealed)
频率范围(-6 dB): 75 Hz - 20 kHz	Frequency response (-6 dB) : 75 Hz - 20 kHz
功率(RMS): 60 W / 100 W	Power handling (RMS / Peak) (AES) : 60 W / 100 W
灵敏度(1 W / 1 m): 85 dB	Sensitivity (1 W / 1 m) : 85 dB
最大声压级(1 m): 103 dB	MAX SPL (1m) : 103 dB
阻抗: 16 Ω	Impedance: 16 Ω
指向角度(水平 × 垂直): 60° × 60°	Dispersion (H × V) : 60° × 60°
低音单元: 4" 铁氧体单元, 1" 音圈	LF Transducer: 4" ferrite magnet, 1" voice coil
高音单元: 钕磁丝膜单元, 1" 音圈	HF Transducer: Neodymium magnet, 1" voice coil
分频点: 3.2 kHz	Crossover frequency: 3.2 kHz
输入/输出接口: 夹式连接	Input interface: Clamp connection
吊挂系统: 3个M6吊挂点	Rigging system: 3x M6 rigging points
箱体材料/喷漆: 12 mm MDF / PU撒点漆	Cabinet material / Coating: 12 mm MDF / PU texture coating
尺寸(W × H × D): 140 × 230 × 130 mm	Dimensions (W × H × D) : 140 × 230 × 130 mm
净重: 2.7 kg	Net Weight: 2.7 kg
可选附件: 见附件页面	Available accessory: See accessories page

型号名称: M-242 (W) G2	Model: M-242 (W) G2
类型: 4" 无源二分频音箱(密闭式)	Type: 4" two way passive loudspeaker (sealed)
频率范围(-6 dB): 75 Hz-20 kHz	Frequency response (-6 dB) : 75 Hz-20 kHz
功率(RMS): 100 W / 180 W	Power handling (RMS / Peak) (AES) : 100 W / 180 W
灵敏度(1 W / 1 m): 88 dB	Sensitivity (1 W / 1 m) : 88 dB
最大声压级(1 m): 108 dB	MAX SPL (1 m) : 108 dB
阻抗: 8 Ω	Impedance: 8 Ω
指向角度(水平 × 垂直): 60° × 60°	Dispersion (H × V) : 60° × 60°
低音单元: 2x 4" 铁氧体单元, 1" 音圈	LF Transducer: 2x 4" ferrite magnet, 1" voice coil
高音单元: 钕磁丝膜单元, 1" 音圈	HF Transducer: Neodymium magnet, 1" voice coil
分频点: 3.2 kHz	Crossover frequency: 3.2 kHz
输入/输出接口: 夹式连接	Input interface: Clamp connection
吊挂系统: 3个M6吊挂点	Rigging system: 3x M6 rigging points
箱体材料/喷漆: 12 mm MDF / PU撒点漆	Cabinet material / Coating: 12 mm MDF / PU texture coating
尺寸(W × H × D): 140 × 378 × 130 mm	Dimensions (W × H × D) : 140 × 378 × 130 mm
净重: 4.8 kg	Net weight: 4.8 kg
可选附件: 见附件页面	Available accessory: See accessories page